



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S0125A		RATED	
FREQUENCY	60	HZ	HEAD	16 m
DISCHARGE	4	INCH 100 MM	CAPACITY	315 L/min
OUTPUT	1	HP 0.75 kW	POLE / RPM	2 P / 3450 RPM
PHASE/VOLTAGE	1	Ø 110 V	START METHOD	DIRECT
RATED CURRENT	A	16.9	INSULATION CLASS	E CLASS

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	73.54	7.10	0.00	109.5	16.89	1.65	1.32	89.00
2	24.6	35.44	3.29	11.44	110.3	15.94	1.56	1.25	88.54
3	31.1	30.24	2.77	12.49	110.4	15.74	1.54	1.23	88.52
4	35.3	27.74	2.52	12.92	110.3	15.83	1.55	1.24	88.63
5	50.5	2.55	0.00	2.19	111.1	12.63	1.20	0.96	85.53

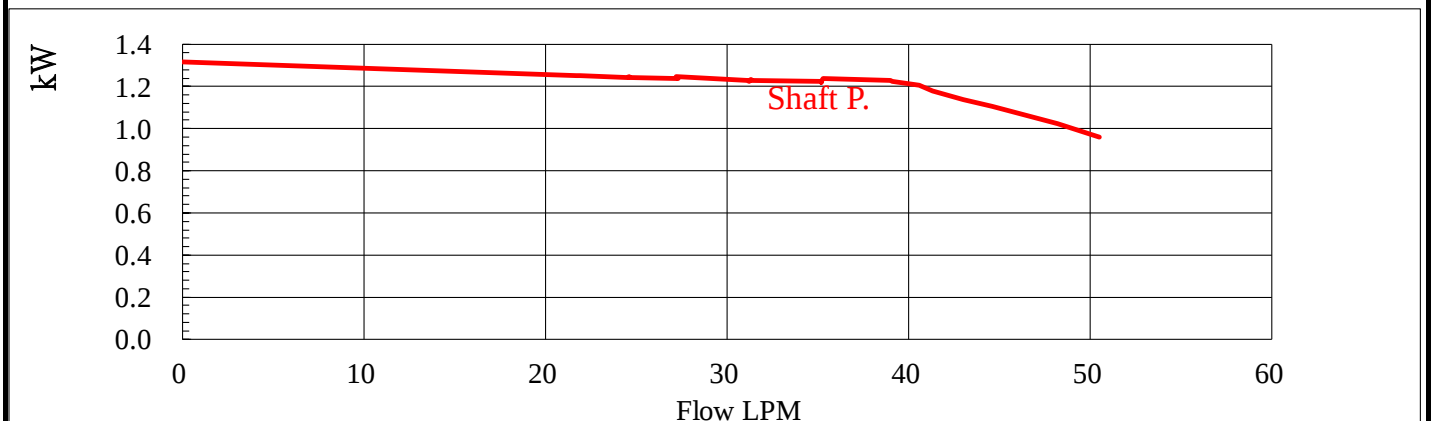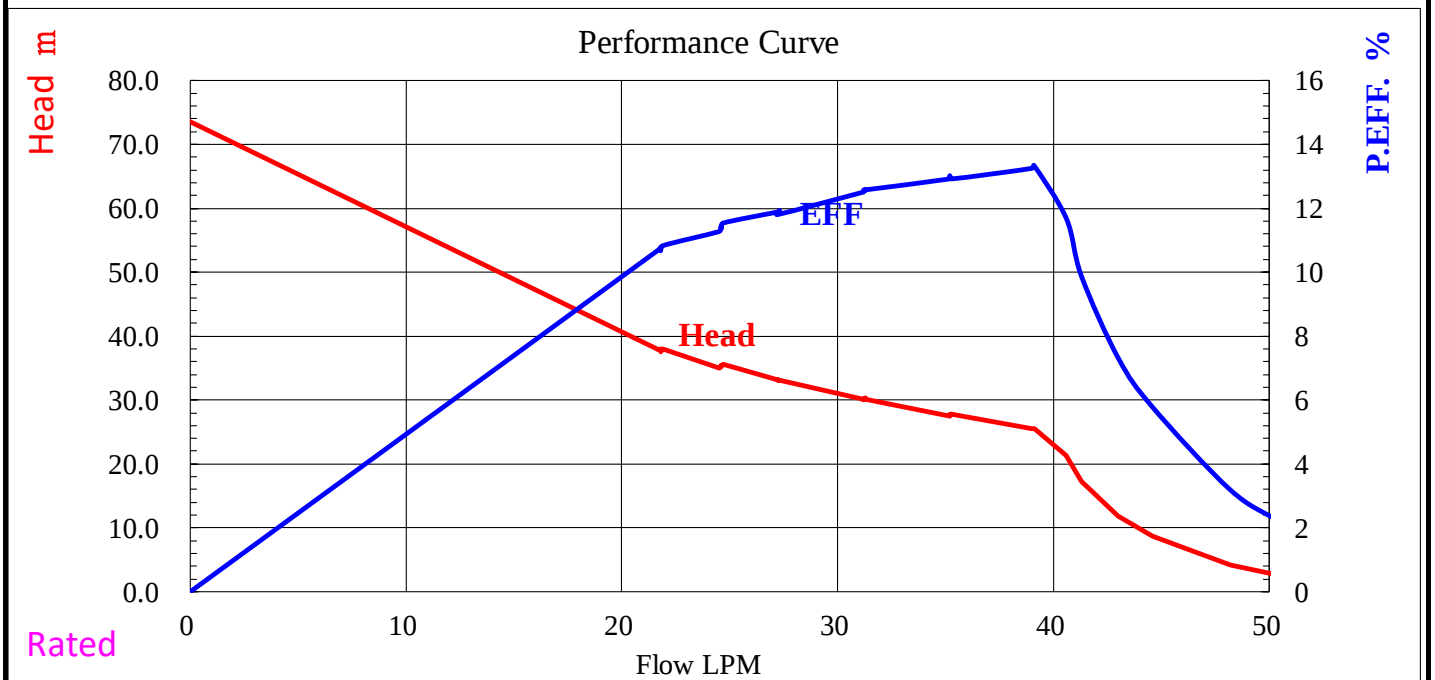

Tester: Timothy Liu

Validate: