



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S3125AT			RATED	
FREQUENCY	60	HZ		16	m
DISCHARGE	4	INCH	100	MM	L/min
OUTPUT	0.5	HP	0.37	kW	
PHASE/VOLTAGE	1	Ø	110	V	
RATED CURRENT	A	6.5	INSULATION CLASS		E CLASS
POLE / RPM		2 P / 3450 RPM		START METHOD	
HEAD		CAPACITY		DIRECT	

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	34.44	3.19	0.00	109.7	6.44	0.66	0.53	93.38
2	25.9	21.54	1.90	17.21	110.2	6.43	0.66	0.53	93.54
3	31.2	19.34	1.68	18.66	110.2	6.40	0.66	0.53	93.67
4	39.3	16.24	1.37	19.71	110.2	6.40	0.66	0.53	93.78
5	54.8	2.55	0.00	4.45	110.3	6.20	0.64	0.51	93.75

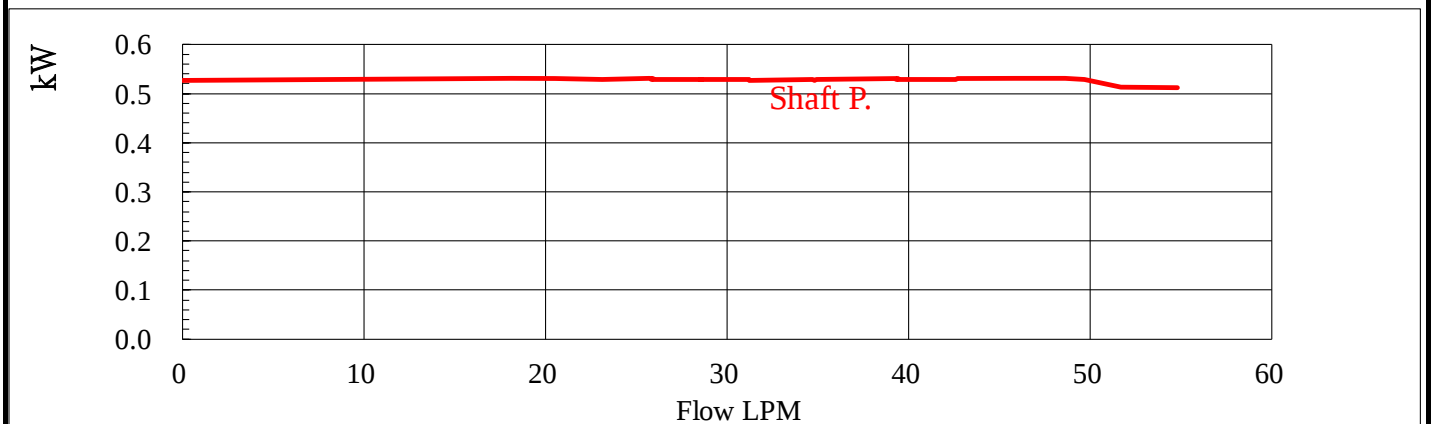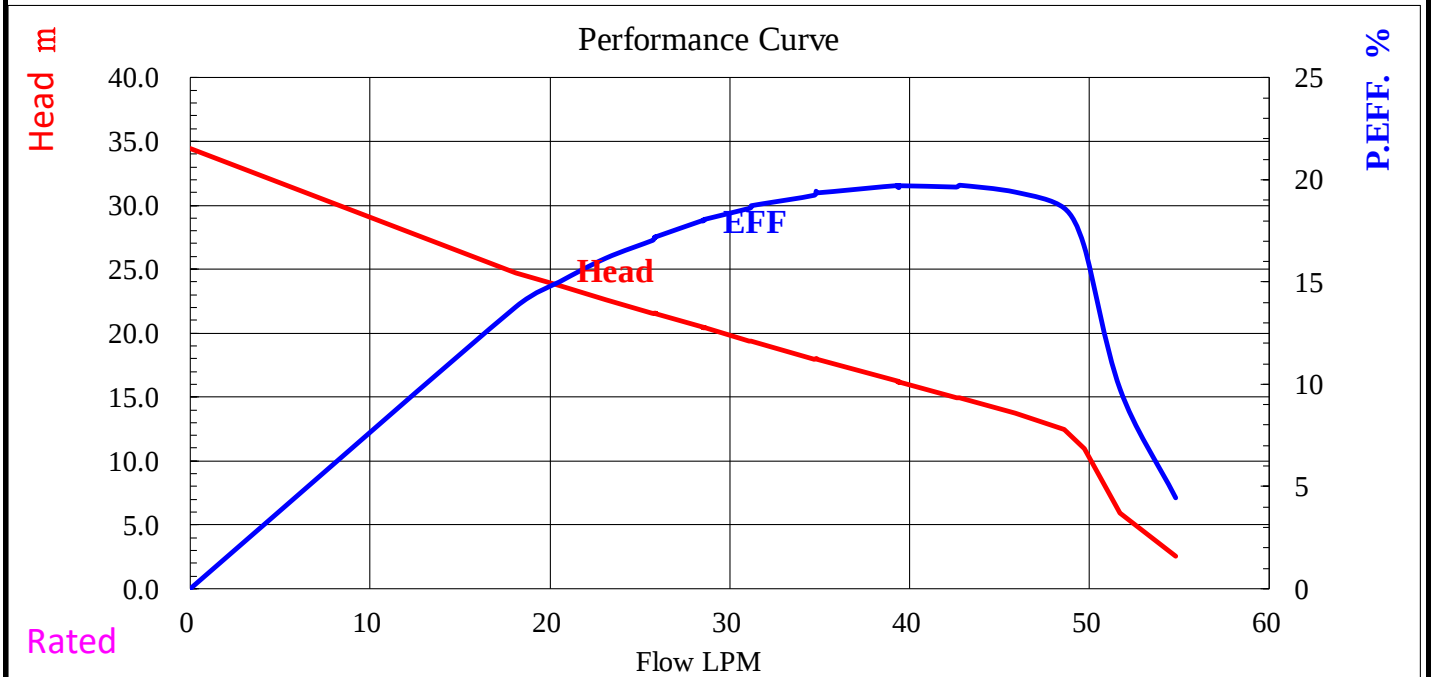

Tester: Timothy Liu

Validate: