



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S3125AT			RATED	
FREQUENCY	60	HZ		16	m
DISCHARGE	4	INCH	100	MM	L/min
OUTPUT	0.5	HP	0.37	kW	
PHASE/VOLTAGE	1	Ø	220	V	
RATED CURRENT	A	3.2	INSULATION CLASS		E CLASS
POLE / RPM		2 P / 3450 RPM		START METHOD	
CAPACITY		315		DIRECT	

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	34.24	3.17	0.00	220.1	3.20	0.66	0.53	93.97
2	26.5	21.14	1.86	17.24	220.1	3.20	0.66	0.53	94.22
3	31.8	19.04	1.65	18.78	220.1	3.17	0.66	0.53	94.32
4	41.9	15.04	1.25	19.31	220.1	3.21	0.67	0.53	94.46
5	54.8	2.55	0.00	4.44	220.2	3.09	0.64	0.51	94.44

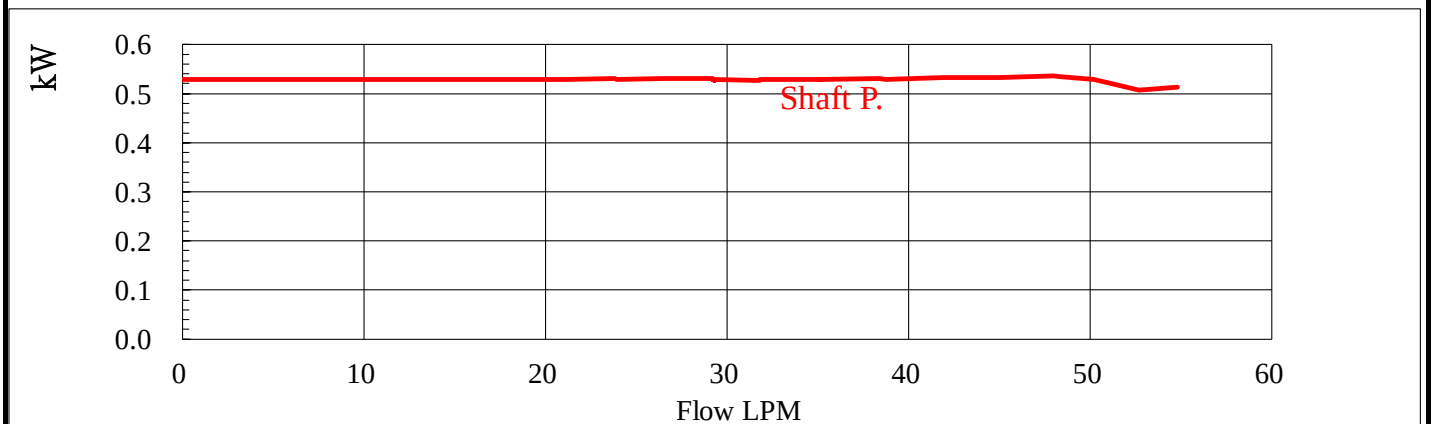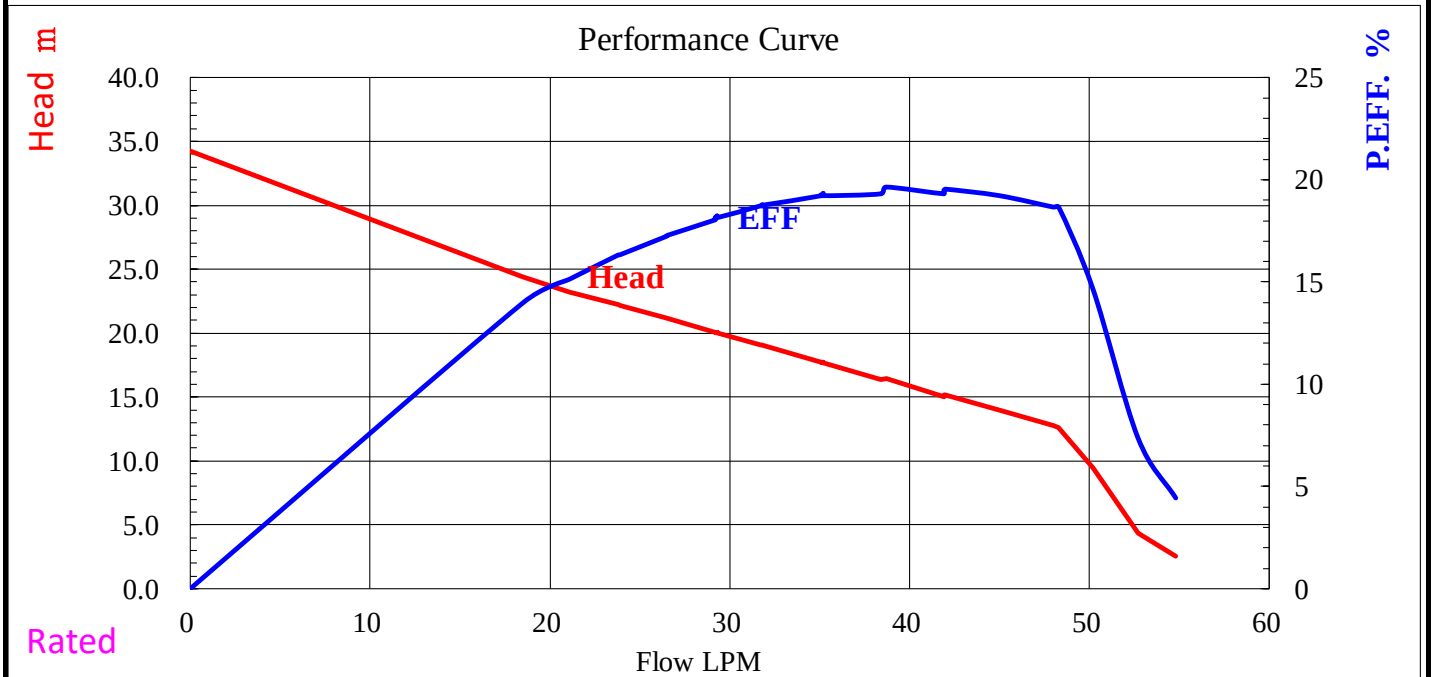

Tester: Timothy Liu

Validate: