



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S0125A		RATED	
FREQUENCY	60	HZ	HEAD	16 m
DISCHARGE	4	INCH 100 MM	CAPACITY	315 L/min
OUTPUT	1	HP 0.75 kW	POLE / RPM	2 P / 3450 RPM
PHASE/VOLTAGE	1	Ø 220 V	START METHOD	DIRECT
RATED CURRENT	A	8.3	INSULATION CLASS	E CLASS

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	74.54	7.20	0.00	220.2	8.30	1.61	1.29	88.23
2	24.1	35.64	3.31	11.43	220.3	7.93	1.54	1.23	87.93
3	30	30.74	2.82	12.47	220.3	7.81	1.51	1.21	87.85
4	37.7	26.24	2.37	13.44	220.3	7.77	1.50	1.20	87.90
5	50.4	2.55	0.00	2.22	220.8	6.29	1.18	0.94	85.00

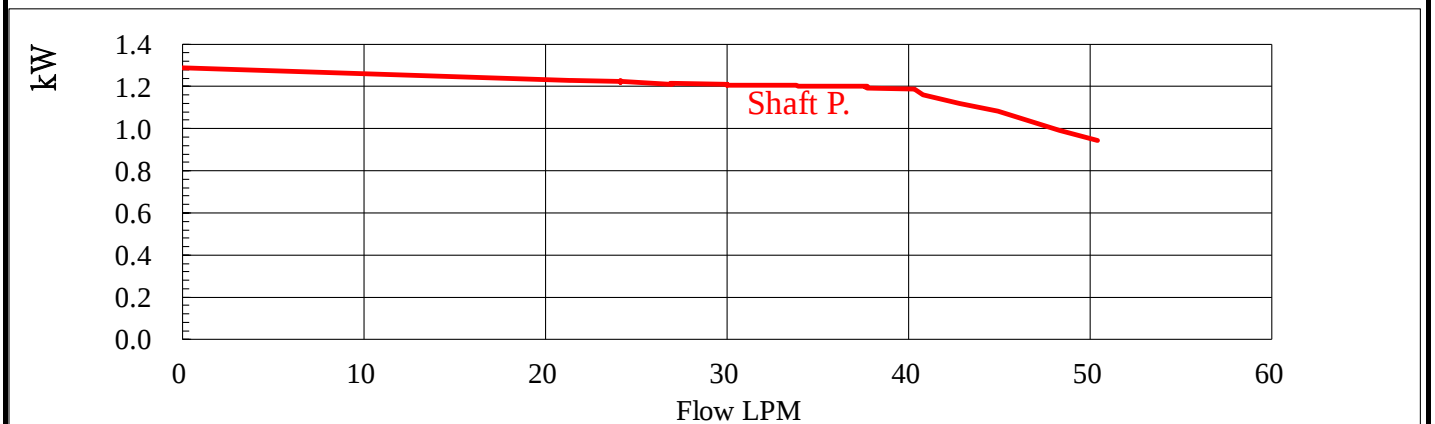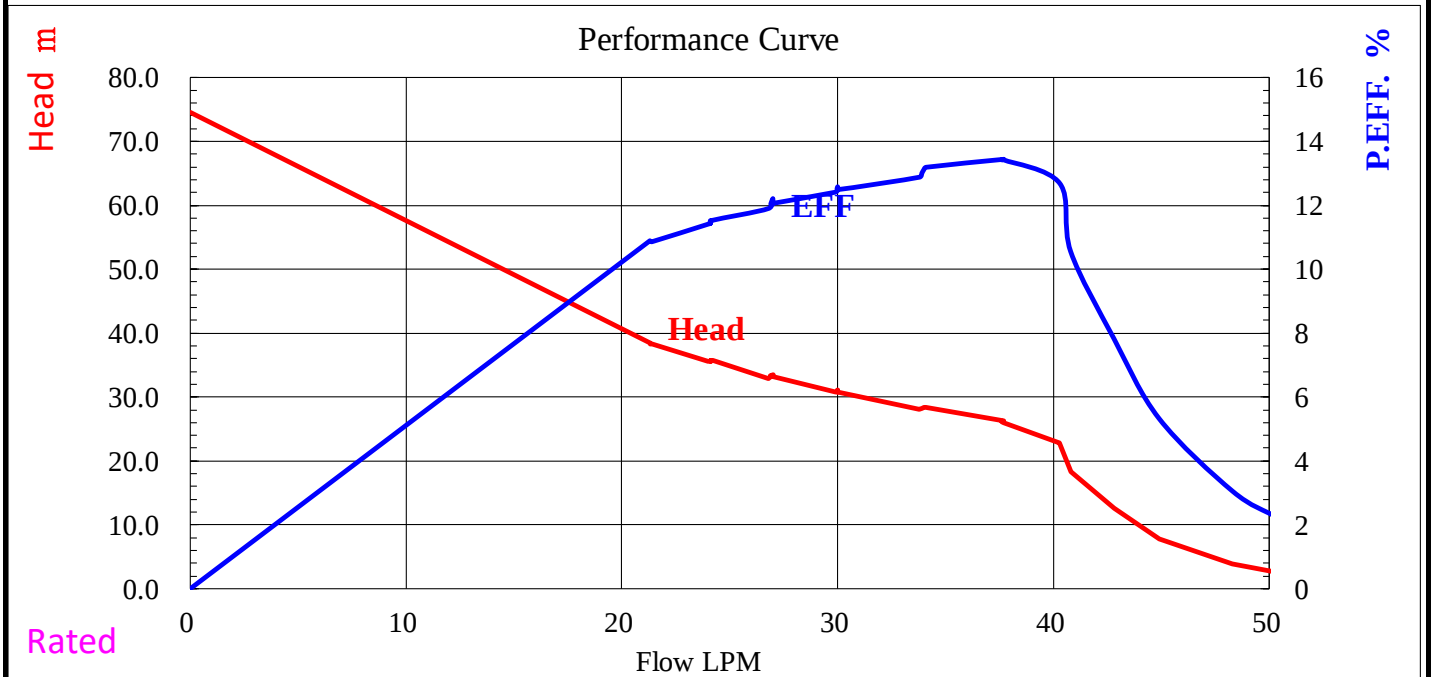

Tester: Timothy Liu

Validate: