



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S3125T			RATED	
FREQUENCY	60	HZ		16	m
DISCHARGE	4	INCH	100	MM	L/min
OUTPUT	0.5	HP	0.37	kW	2 P / 3450 RPM
PHASE/VOLTAGE	1	Ø	110	V	DIRECT
RATED CURRENT	A	6.7	INSULATION CLASS		E CLASS

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	27.54	2.50	0.00	109.7	6.35	0.65	0.52	93.44
2	34.2	18.24	1.57	18.85	110.2	6.54	0.68	0.54	93.78
3	43.2	15.64	1.31	20.32	110.2	6.56	0.68	0.54	93.97
4	53	12.64	1.01	20.05	110.2	6.59	0.68	0.55	94.09
5	75.3	2.55	0.00	5.74	110.2	6.56	0.68	0.55	94.22

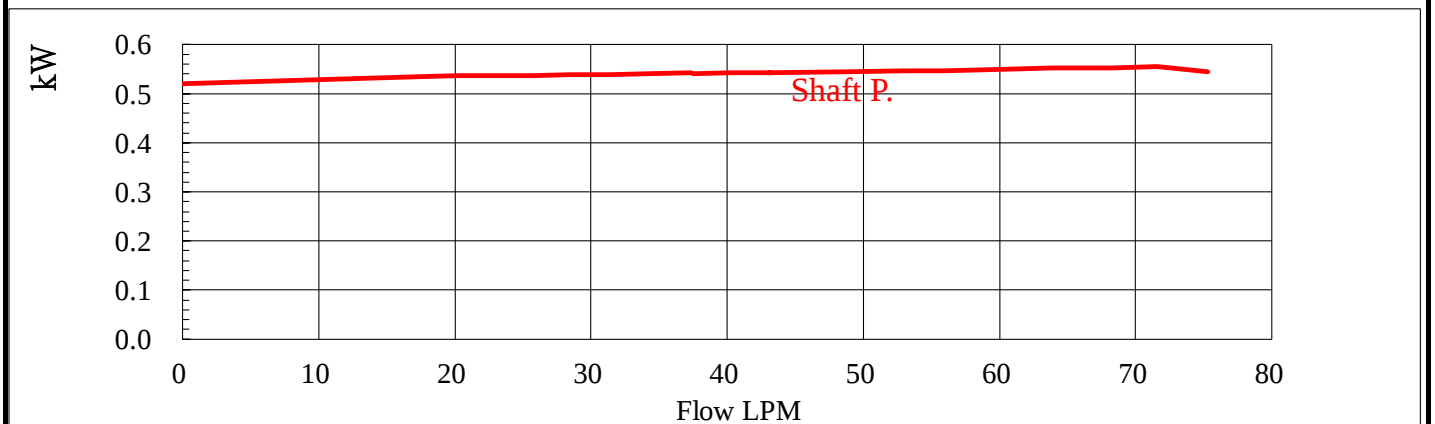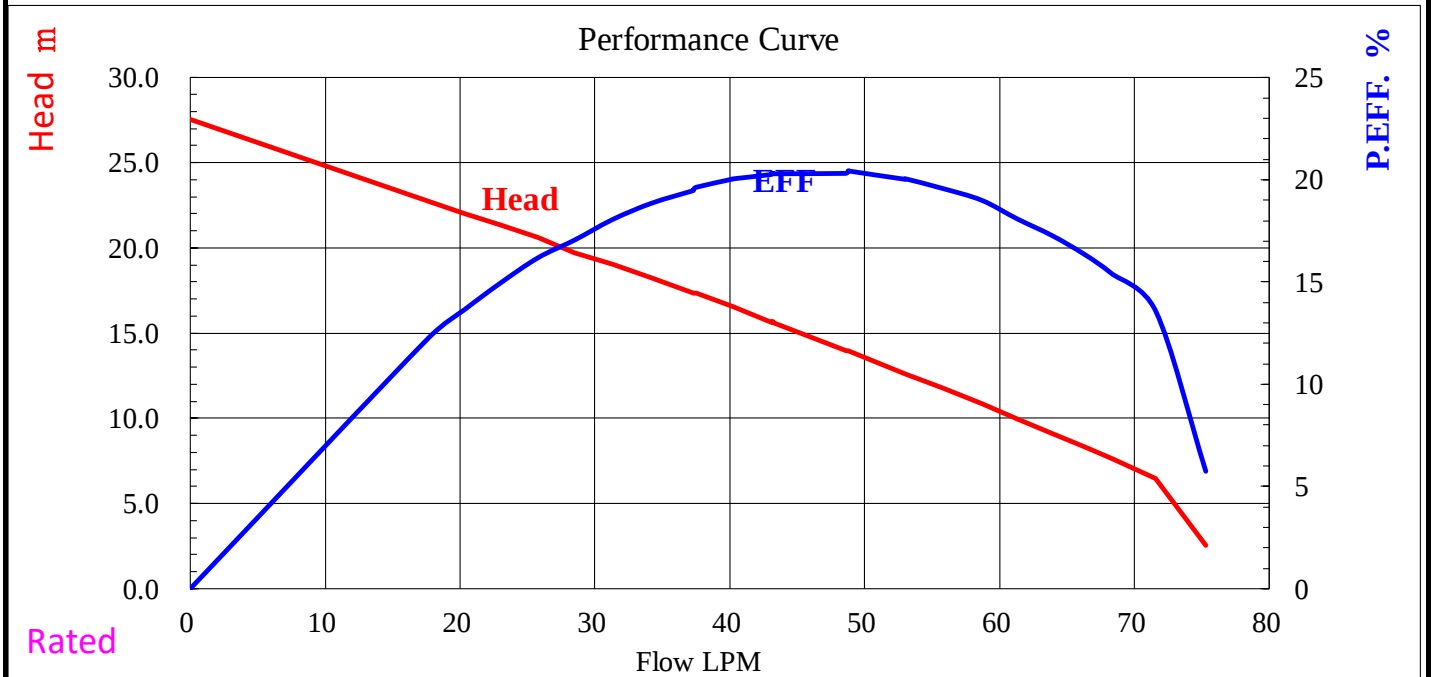

Tester: Timothy Liu

Validate: