



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	S3125T			RATED	
FREQUENCY	60	HZ		16	m
DISCHARGE	4	INCH	100	MM	L/min
OUTPUT	0.5	HP	0.37	kW	2 P / 3450 RPM
PHASE/VOLTAGE	1	Ø	220	V	DIRECT
RATED CURRENT	A	3.3	INSULATION CLASS		E CLASS

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	27.54	2.50	0.00	220.1	3.11	0.64	0.51	93.80
2	35.4	17.94	1.54	19.20	220.1	3.25	0.68	0.54	94.39
3	44.8	15.14	1.26	20.45	220.1	3.26	0.68	0.54	94.47
4	54.7	12.04	0.95	19.71	220.1	3.28	0.68	0.55	94.59
5	75	2.55	0.00	5.70	220.1	3.28	0.68	0.55	94.67

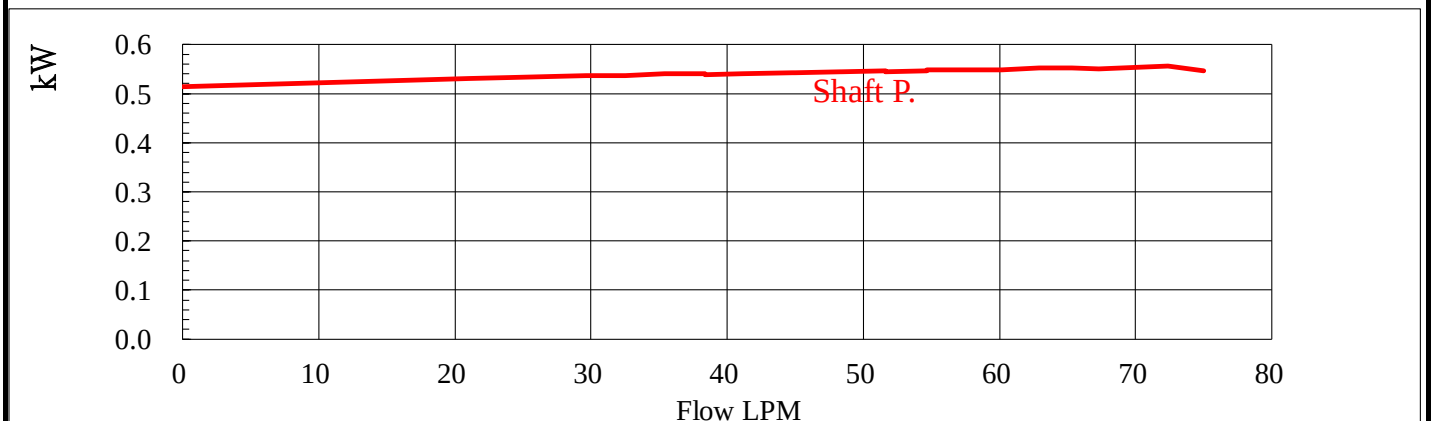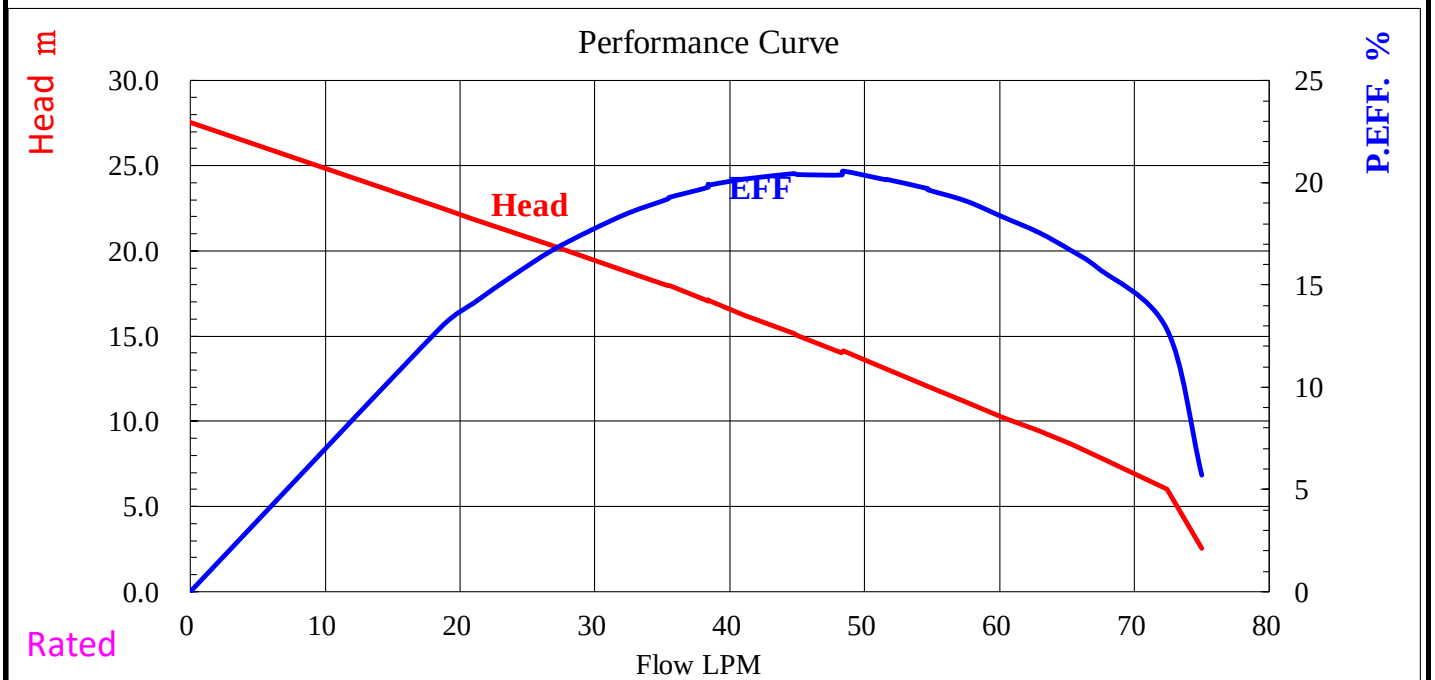

Tester: Timothy Liu

Validate: