



川山泵浦

FILE NO. 0

PUMP PERFORMANCE REPORT

MODEL	H0250			RATED	
FREQUENCY	60	HZ		HEAD	16 m
DISCHARGE	4	INCH 100 MM		CAPACITY	315 L/min
OUTPUT	2	HP 1.49 kW		POLE / RPM	2 P / 3450 RPM
PHASE/VOLTAGE	1	∅ 110 V		START METHOD	DIRECT
RATED CURRENT	A	24.3	INSULATION CLASS		E CLASS

NO	PUMP				MOTOR				
	Flow	Head	Pressure	P.EFF.	Voltage	Current	Input Power	Shaft Power	P.F.
	L/min	m	kg/cm ²	%	V	A	kW	kW	%
1	0	42.84	4.03	0.00	111.4	15.05	1.45	1.16	86.69
2	133	34.24	3.17	43.76	110.2	21.14	2.13	1.70	91.23
3	196	26.14	2.36	44.32	110.4	23.26	2.36	1.89	91.99
4	237	19.74	1.72	39.31	110.2	23.92	2.43	1.95	92.21
5	338	2.55	0.00	7.26	110.5	23.77	2.42	1.94	92.22

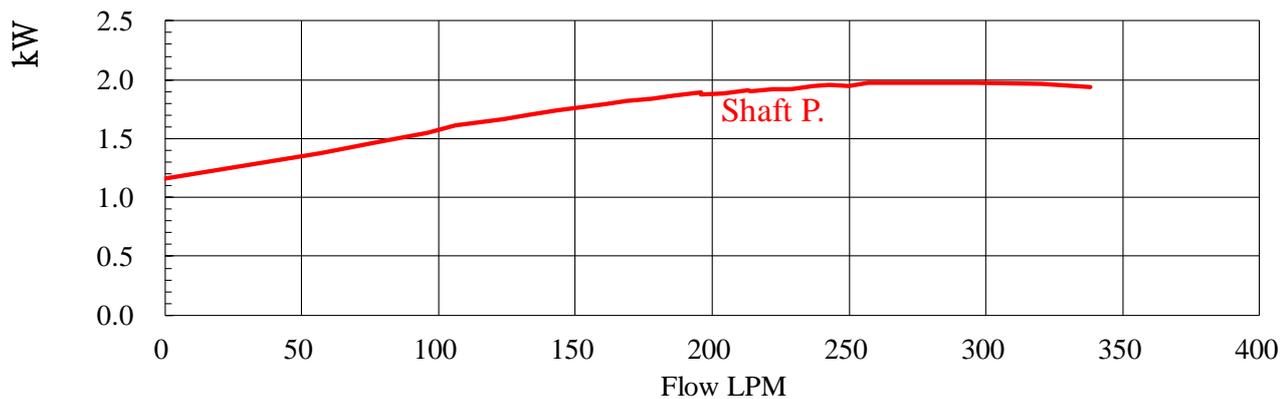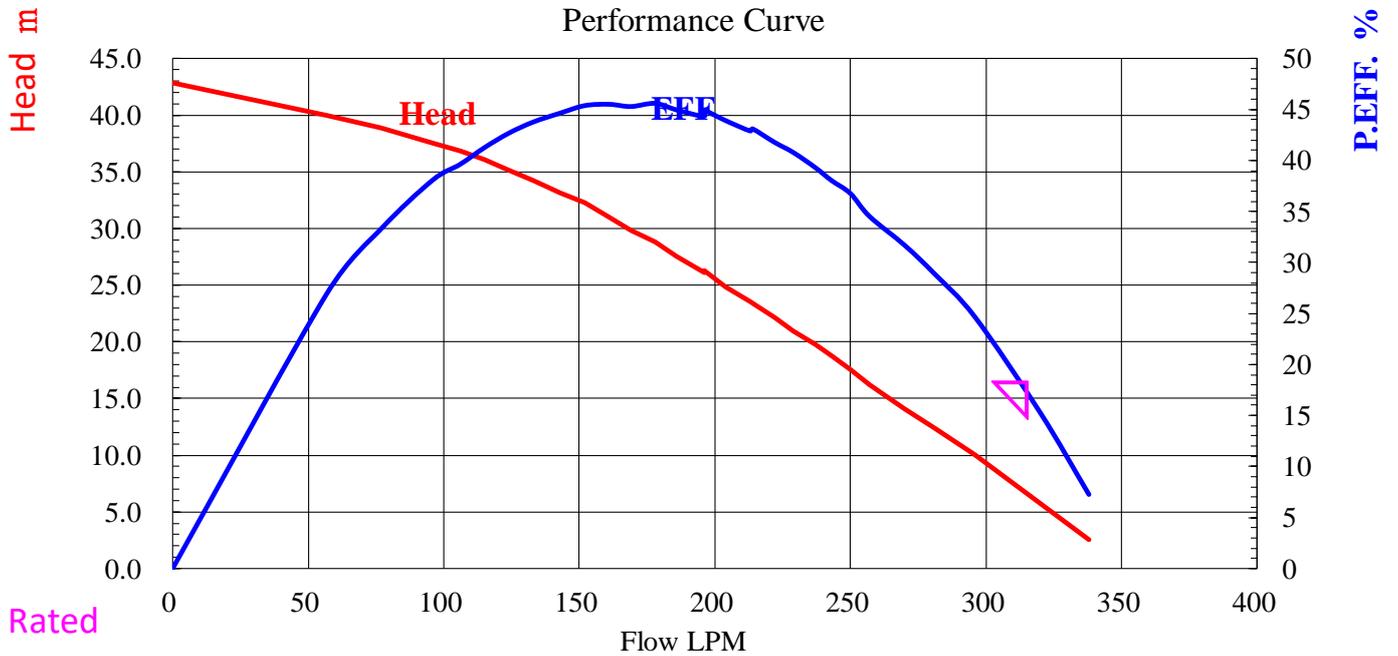

Tester: Timothy Liu

Validate: